

GOODWE SMART METER & WIFI RECONNECTION GUIDE





1) OPEN THE SEMS PORTAL APP FROM GOODWE.

Open the Goodwe App on your smart device and Login (or Register).

2) CLICK THE WIFI BUTTON.

Click the 'wifi' button from the bottom menu bar. Make sure the device (e.g. inverter, HomeKit) is powered on.

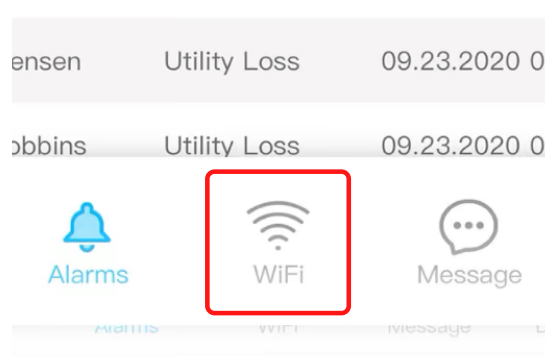


3) WAIT FOR DEVICE INDICATOR TO LIGHT UP.

Once the device indicator 'lights up' click 'Next'.

4) CONFIGURE THE WIFI CONNECTION.



Open the WLAN settings, this will open your WiFi settings in your Iphone.

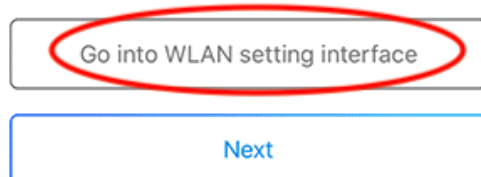

5) CONNECT TO YOUR SYSTEMS WIFI NETWORK.

Connect to WiFi Network: Solar-WiFi*. (* denotes the last 8 digits of the device serial number e.g. Solar-WiFi221W0445).

Password is 12345678
Once connected return to the SEMS Portal App.

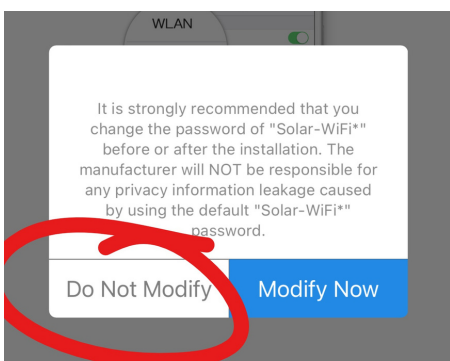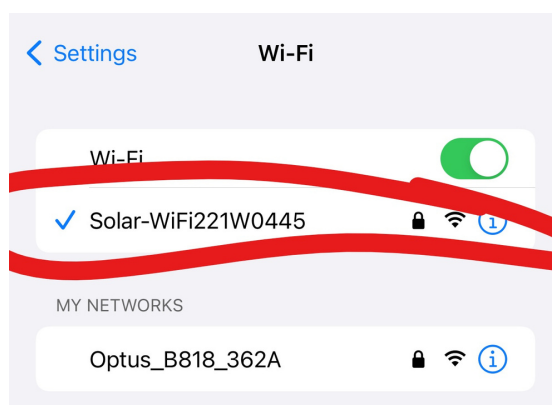

6) DO NOT MODIFY PASSWORD.

If you receive a pop-up message suggesting that you change the password for the Solar-Wifi* device, select 'Do Not Modify'.

5) CONNECT TO YOUR HOME WIFI NETWORK.

In the SEMS Portal app connect to your home WiFi network by selecting your network and entering your password.

Then hit 'Done'.

